


### DQC W-SERIES WINGSTYLE INTERCHANGE HEX-NUT FEMALE COUPLER

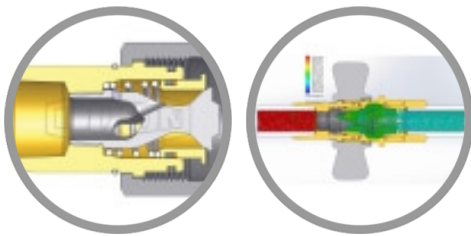

\* Referential image

\*\* Some features may vary without prior notice. Sale subject to inventory availability

DATE

: 05/25/2026 04:45 AM

SKU

: 698

BRAND

: DIXON VALVE

MODEL

: 12WBF12-B-HN

#### Applications:

Designed for applications requiring a coupling that can be connected under residual pressure with minimum spillage and air inclusion. Widely used on dump trailer wet-line hydraulic systems and oil field equipment. Not recommended for continuous hydraulic impulse applications.

#### Specifications:

##### Construction:

Machined components are manufactured using solid bar stock

Stainless steel retaining rings and springs maximize corrosion resistance and extend service life.

Steel componentry is plated using ROHS Compliant Trivalent Chrome.

Nitrile (Buna-N) seals are standard

Main coupler valve has a bonded face-seal to improve seal integrity during pressurized connection/disconnection.

Redundant O-Ring on the coupler body will engage nipple for secondary sealing support.

#### Compatibility & Interchange Data:

Aeroquip 5100-Series, Parker 6100-Series

Snap-Tite 78-Series, Faster Series-FB, Safeway S51-Series

#### Safety notes:

Although wingstyle couplings are able to connect and disconnect while under pressure, it is recommended that hydraulic power supply be de-energized during connection to ensure operator safety. If it is not possible to de-energize the circuit, operators must be aware of their surroundings to ensure that an attachment or tool does not put them at risk, once hydraulic power is applied during the connection process.

W-series couplings are not recommended for continuous hydraulic impulse applications at rated pressures.

WARNING: Cancer and Reproductive Harm- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## TECHNICAL SPECIFICATIONS

<b>Body Size</b>	1-1/2"
<b>Burst Pressure</b>	10,000 PSI (690 Bar)
<b>Factory Part Number</b>	12WBF12-B-HN
<b>Hex</b>	2-7/64"
<b>Length</b>	3.67" (93.2 mm)
<b>Material</b>	Brass
<b>Maximum OD</b>	3.01" (76.5 mm)
<b>Maximum Operating Pressure</b>	2,500 PSI (172 bar)
<b>Temperature Range</b>	-40°F to +250° F (-40°C to +121°C)
<b>Thread</b>	Female BSPP
<b>Thread Size</b>	1-1/2"-11
<b>Weight Lb</b>	3.1500