


FEMALE 37° JIC SWIVEL X PUSH-ON 90° ELBOW

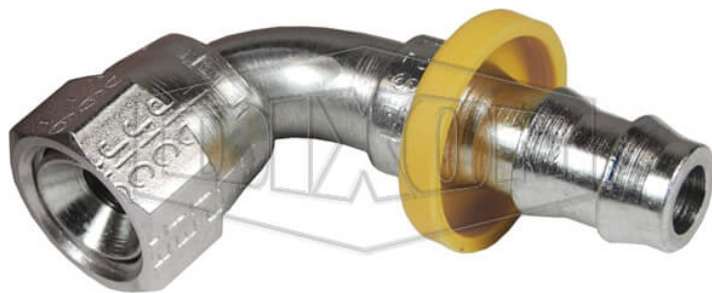

* Referential image

** Some features may vary without prior notice. Sale subject to inventory availability

DATE

: 07/08/2026 06:54 AM

SKU

: 2934

BRAND

: DIXON VALVE

MODEL

: 2890609C

Specifications:

Number of Barbs: 2

Length Centerline C: 1.85"

Length Centerline D:.91"

Features:

JIC only

Installation

Assembly Instructions:

1. Trim hose end with smooth square cut.
2. Lubricate either push-on fitting, hose or both.
3. Insert push-on fitting into hose until first barb is in hose.
4. Place end of fitting against a flat object (bench, wall, etc.) and grip the hose one inch from end. Push with a steady force until end of hose is covered by yellow plastic cap.

Instructions

Disassembly instructions:

1. Leaving push-on fitting in place, make a 1" cut in the hose along the barbed end of the fitting. Note: Be careful not to nick barbs when cutting the hose.
2. With firm grip on hose, give a sharp downward pull to release the fitting from the hose.

Note:

No hose clamps or ferrules are needed

Part is JIC only, may substitute dual angle. Contact Dixon.

Safety notes:

Dixon push-on fittings are intended for use with Lok-On (push-on style) hose only.

Caution: Push-on fittings will properly grip push-on hose only when pushed all the way in, with the cut end of the hose completely concealed by the plastic cap.

WARNING: Cancer and Reproductive Harm- www.P65Warnings.ca.gov

TECHNICAL SPECIFICATIONS

| | |
|----------------------------|--------------------|
| Factory Part Number | 2890609C |
| Component Material | Yellow Plastic Cap |
| Weight Lb | 0.1000 |
| Female Thread | UNF |
| Female Thread Size | 9/16"-18 |
| Hose ID | 3/8" |
| Material | Plated Steel |
| Pressure Rating | 350 PSI |
| Temperature Range | -40 to +150°F |
| Tube OD | 3/8" |