


**FEMALE 37° JIC SWIVEL X  
PUSH-ON 90° ELBOW**

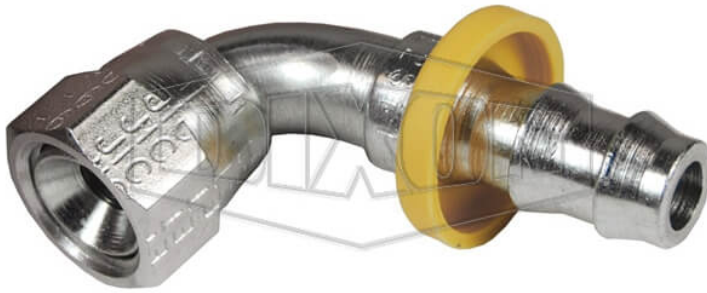

DATE  
: 05/21/2026 10:22 PM

SKU  
: 2937

BRAND  
: DIXON VALVE

MODEL  
: 2891217C

Specifications:  
Number of Barbs: 3  
Length Centerline C: 3.26"  
Length Centerline D: 1.81"

Features:  
JIC only

Installation

Assembly Instructions:

1. Trim hose end with smooth square cut.
2. Lubricate either push-on fitting, hose or both.
3. Insert push-on fitting into hose until first barb is in hose.
4. Place end of fitting against a flat object (bench, wall, etc.) and grip the hose one inch from end. Push with a steady force until end of hose is covered by yellow plastic cap.

Instructions

Disassembly instructions:

1. Leaving push-on fitting in place, make a 1" cut in the hose along the barbed end of the fitting. Note: Be careful not to nick barbs when cutting the hose.
2. With firm grip on hose, give a sharp downward pull to release the fitting from the hose.

Note:

No hose clamps or ferrules are needed  
Part is JIC only, may substitute dual angle. Contact Dixon.

Safety notes:

Dixon push-on fittings are intended for use with Lok-On (push-on style) hose only.

\* Referential image

\*\* Some features may vary without prior notice. Sale subject to inventory availability

Caution: Push-on fittings will properly grip push-on hose only when pushed all the way in, with the cut end of the hose completely concealed by the plastic cap.

WARNING: Cancer and Reproductive Harm- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## TECHNICAL SPECIFICATIONS

<b>Factory Part Number</b>	2891217C
<b>Component Material</b>	Yellow Plastic Cap
<b>Weight Lb</b>	0.4000
<b>Female Thread</b>	UN
<b>Female Thread Size</b>	1-1/16"-12
<b>Hose ID</b>	3/4"
<b>Material</b>	Plated Steel
<b>Pressure Rating</b>	350 PSI
<b>Temperature Range</b>	-40 to +150°F
<b>Tube OD</b>	3/4"