


FEMALE 37° JIC SWIVEL X PUSH-ON 90° ELBOW

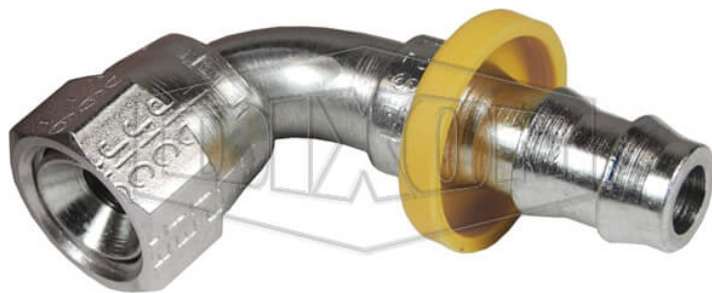

* Referential image

** Some features may vary without prior notice. Sale subject to inventory availability

DATE

: 07/08/2026 07:45 AM

SKU

: 2937

BRAND

: DIXON VALVE

MODEL

: 2891217C

Specifications:

Number of Barbs: 3

Length Centerline C: 3.26"

Length Centerline D: 1.81"

Features:

JIC only

Installation

Assembly Instructions:

1. Trim hose end with smooth square cut.
2. Lubricate either push-on fitting, hose or both.
3. Insert push-on fitting into hose until first barb is in hose.
4. Place end of fitting against a flat object (bench, wall, etc.) and grip the hose one inch from end. Push with a steady force until end of hose is covered by yellow plastic cap.

Instructions

Disassembly instructions:

1. Leaving push-on fitting in place, make a 1" cut in the hose along the barbed end of the fitting. Note: Be careful not to nick barbs when cutting the hose.
2. With firm grip on hose, give a sharp downward pull to release the fitting from the hose.

Note:

No hose clamps or ferrules are needed

Part is JIC only, may substitute dual angle. Contact Dixon.

Safety notes:

Dixon push-on fittings are intended for use with Lok-On (push-on style) hose only.

Caution: Push-on fittings will properly grip push-on hose only when pushed all the way in, with the cut end of the hose completely concealed by the plastic cap.

WARNING: Cancer and Reproductive Harm- www.P65Warnings.ca.gov

TECHNICAL SPECIFICATIONS

Factory Part Number	2891217C
Component Material	Yellow Plastic Cap
Weight Lb	0.4000
Female Thread	UN
Female Thread Size	1-1/16"-12
Hose ID	3/4"
Material	Plated Steel
Pressure Rating	350 PSI
Temperature Range	-40 to +150°F
Tube OD	3/4"