


## SAE 45° FLARE FEMALE CONNECTOR

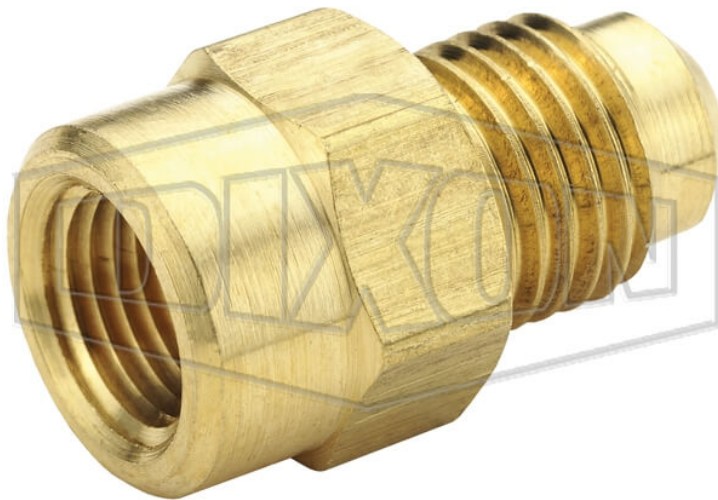

DATE  
: 04/26/2026 09:09 PM

SKU  
: 22544

BRAND  
: DIXON VALVE

MODEL  
: 46F-6-8

**Use:**

Manufactured especially for hard-to-hold liquids and gases

Use with copper, brass, aluminum and welded steel hydraulic tubing that can be flared

**Specifications:**

Listed with Underwriter's Laboratories for flammable liquid, marine, refrigeration and gas applications. Meets functional requirements of SAE J512 and J513, ASA and MS (Military Standards).

Reference SAE 010103

**Features:**

Economical fitting resists mechanical pullout

Easy to disassemble and may be reassembled repeatedly, for a leak-proof connection

**Construction:**

Manufactured from CA 360, CA 345 or CA377 brass

**Installation**

Cut tubing squarely and clean tube end thoroughly to remove burrs.

Place nut onto tube. Place threaded end of nut toward end of tube.

Flare tube end with flaring tool to provide 45° flare.

Clamp tube flare between nut and nose of fitting body by screwing nut on finger-tight. Tighten with a wrench an additional 1/4 turn for metal-to-metal seal.

**Note:**

Flare tools are available, please contact Dixon for pricing and availability.

**Safety notes:**

*\* Referential image*

*\*\* Some features may vary without prior notice. Sale subject to inventory availability*

The PSI rating given is based on a temperature of 73°F (23°C) using copper tubing.

Temperature and type of tubing used are important factors in working pressure ranges.

WARNING: Cancer and Reproductive Harm- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

### TECHNICAL SPECIFICATIONS

<b>Factory Part Number</b>	46F-6-8
<b>Hex</b>	1"
<b>Material</b>	Brass
<b>Pipe Size</b>	1/2"
<b>Temperature Range</b>	-65°F to 250°F (-54°C to 121°C)
<b>Thread</b>	Straight
<b>Thread Size</b>	5/8"-18
<b>Tube Size</b>	3/8"
<b>Weight Lb</b>	0.1650
<b>Working Pressure</b>	1000 PSI