

DUAL-LOCK P-SERIES THOR INTERCHANGE COUPLER WITH FERRULE




DATE
: 07/10/2026 10:57 AM

SKU
: 22687

BRAND
: DIXON VALVE

MODEL
: 4PS6-WF

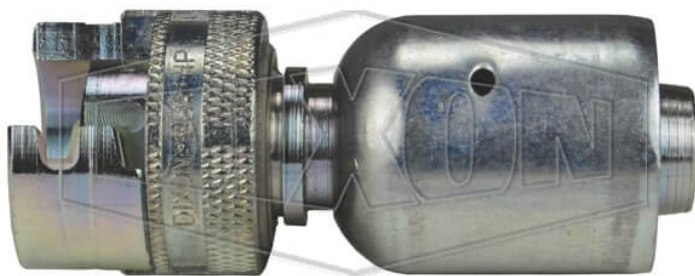

Construction:

Machined components are manufactured using solid steel bar stock
Stainless steel retaining ring and spring maximize corrosion resistance and extend service life

Steel componentry is plated using ROHS Compliant Trivalent Chrome
Steel couplings have a zinc cast sleeve

Nitrile (Buna-N) seals standard, temperature range-40°F to 250°F (-40°C to 121°C)

Available Options:

3/8" and 1" sizes available upon request, contact Dixon®

Compatibility & Interchange Data:

Thor Finger-Lock Interchange

Interchanges with Thor PHC-series, National Series 'A' and Campbell Double-Lock

Safety notes:

WARNING: Cancer and Reproductive Harm- www.P65Warnings.ca.gov

* Referential image

** Some features may vary without prior notice. Sale subject to inventory availability

TECHNICAL SPECIFICATIONS

Body Size	1/2"
Factory Part Number	4PS6-WF
Hose ID	3/4"
Hose OD From	1-10/64"
Hose OD To	1-22/64"
Material	Trivalent Chrome Plated Steel

TECHNICAL SPECIFICATIONS

Weight Lb	0.7000
Working Pressure	300 PSI at ambient temperature 70°F (21°C)