

## DQC H-SERIES ISO-B HIGH VOLUME FEMALE PLUG

DATE  
: 07/09/2026 12:41 PM

SKU  
: 24457

BRAND  
: DIXON VALVE

MODEL  
: H12BF12-SS



Features:  
Poppet style shut-off valves  
Designed to prevent fluid loss when disconnected

Construction:  
Machined components are manufactured using solid bar stock  
Stainless steel balls, retaining rings and springs maximize corrosion resistance and extend service life.

Available Options:  
Contact Dixon for all available option adders

Compatibility & Interchange Data:  
Meets dimensional requirements of ISO 7241 Series B  
Interchangeable with Parker-Hannifin 60 Series, Snap-Tite 72-Series, Hansen HK-Series, Faster Series 'HNV', Aeroquip/Eaton FD45, Stucchi Series IRB/IRBO/IRBX

Safety notes:  
WARNING: Cancer and Reproductive Harm- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

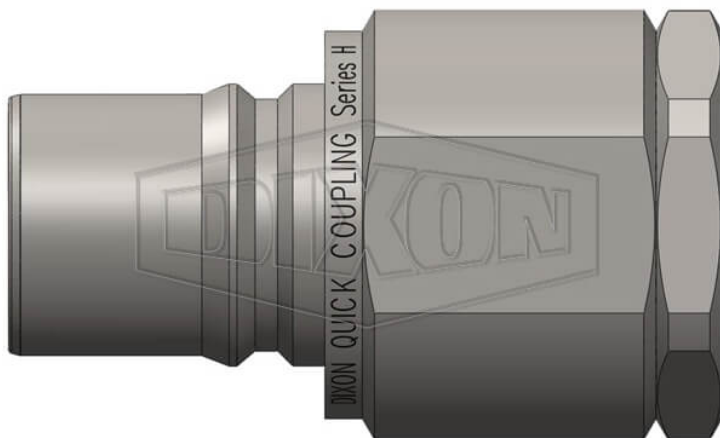

\* Referential image  
\*\* Some features may vary without prior notice. Sale subject to inventory availability

## TECHNICAL SPECIFICATIONS

|                                   |                                   |
|-----------------------------------|-----------------------------------|
| <b>Body Size</b>                  | 1-1/2"                            |
| <b>Burst Pressure</b>             | 7000 PSI (480 bar)                |
| <b>Factory Part Number</b>        | H12BF12-SS                        |
| <b>Hex</b>                        | 2-5/8"                            |
| <b>Length</b>                     | 4.76" (120.9mm)                   |
| <b>Material</b>                   | 316 Stainless Steel               |
| <b>Maximum OD</b>                 | 2.88" (73.2mm)                    |
| <b>Maximum Operating Pressure</b> | 1000 PSI (70 bar)                 |
| <b>Temperature Range</b>          | -40°F to +250°F (-40°C to +121°C) |
| <b>Thread</b>                     | Female BSPP                       |
| <b>Thread Size</b>                | 1-1/2"-11                         |