


HSC SERIES SPRING CHECK VALVE

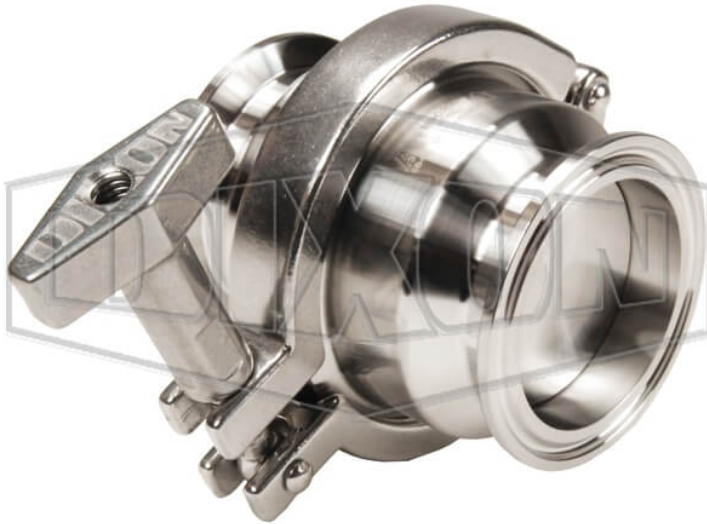

DATE
: 05/02/2026 11:45 PM

SKU
: 15405

BRAND
: DIXON VALVE

MODEL
: HSCE250

Applications:
Spring check valves are designed to prevent reverse flow. The concentric design makes them ideal for vertical applications.

Features:
Single piece upper body spider design
Machined from solid bar
Standard O-ring and gasket seal design
Can be serviced in field (no special tools required)
Finish: sanitary polish 32 Ra

Available Options:
Various end connections available

Safety notes:
WARNING: Cancer and Reproductive Harm- www.P65Warnings.ca.gov

TECHNICAL SPECIFICATIONS

Cracking Pressure	0.8 PSI
Elastomer	EPDM
Material	316L Stainless Steel, CF8M (plunger)
Maximum Operating Pressure	145 PSI
Optional Pkg/Box Qty	1
Factory Part Number	HSCE250
Size	2-1/2"
Style	Clamp Connection

* Referential image
** Some features may vary without prior notice. Sale subject to inventory availability

TECHNICAL SPECIFICATIONS

Temperature Range	15°F to 200°F (-9.4°C to 93°C)
Weight Lb	3.6500