

DQC HT-SERIES FLUSHFACE FEMALE THREADED PLUG



DATE
: 05/23/2026 01:38 PM

SKU
: 15552

BRAND
: DIXON VALVE

MODEL
: HT2BF2

Specifications:

Rated pressure for connected Steel Coupler and Steel Plug: 4,575 PSI (316 bar) Maximum Working and 18,300 PSI (1,262 bar) burst
Rated pressure for uncoupled Steel Plug: 4,575 PSI (316 bar) Maximum Working and 18,300 PSI (1,262 bar) burst

Features:

High flow performance, compact profile
Easily rebuildable!
High strength laser-cut valve guide maximizes valve stability while minimizing flow restriction.
Improved sealing system incorporates a high performance molded polyurethane or O-ring energized PTFE valve seal.

Construction:


Machined components are manufactured using solid bar stock
Steel nipples are hardened to provide resistance to brinelling during impulse service.
Has molded Polyurethane valve seals, with a temperature range of -65° to +212°F
Ancillary nipple seals are Nitrile (Buna-N), with a temperature range of -40°F to +250°F
PTFE or TPC-ET Anti-Extrusion ring protects main coupling valve seal from dynamic impulse pressure damage.

Available Options:

Contact Dixon for all available option adders
Oxy-clean treatment is available

Compatibility & Interchange Data:

Interchangeable to ISO16028

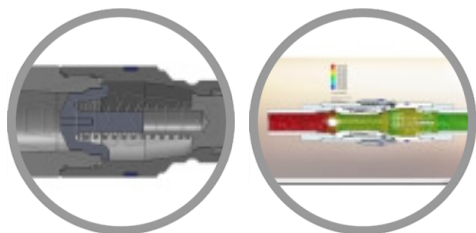

* Referential image

** Some features may vary without prior notice. Sale subject to inventory availability

Conforms to ISO16028 interchange standard interchangeable with Eaton/Hansen FF, Parker FEM, Snap-tite 74, Faster FFH/2FFN/2FFI, Stucchi A/FIRG and Holmbury HQ/A/FIMC

Safety notes:

WARNING: Cancer and Reproductive Harm- www.P65Warnings.ca.gov

TECHNICAL SPECIFICATIONS

Body Size	1/4"
Factory Part Number	HT2BF2
Hex	7/8"
Length	1.89" (48.0mm)
Material	Steel
Maximum OD	0.97" (24.6mm)
Pressure Rating	See Product Details
Thread	Female BSPP
Thread Size	1/4"-19
Weight Lb	0.1980