

## DQC HT-SERIES FLUSHFACE FEMALE THREADED PLUG



DATE  
: 07/10/2026 02:30 AM

SKU  
: 15629

BRAND  
: DIXON VALVE

MODEL  
: HT6F8

### Specifications:

Rated pressure for connected Steel Coupler and Steel Plug: 5,000 PSI (345 bar) Maximum Working and 20,000 PSI (1,379 bar) burst

Rated pressure for uncoupled Steel Coupler: 5,000 PSI (345 bar) Maximum Working and 20,000 PSI (1,379 bar) burst

### Features:

High flow performance, compact profile

Easily rebuildable!

High strength laser-cut valve guide maximizes valve stability while minimizing flow restriction.

Improved sealing system incorporates a high performance molded polyurethane or O-ring energized PTFE valve seal.

### Construction:

Machined components are manufactured using solid bar stock

Steel nipples are hardened to provide resistance to brinelling during impulse service.

Has molded Polyurethane valve seals, with a temperature range of -65° to +212°F

Ancillary nipple seals are Nitrile (Buna-N), with a temperature range of -40°F to +250°F

PTFE or TPC-ET Anti-Extrusion ring protects main coupling valve seal from dynamic impulse pressure damage.


### Available Options:

Contact Dixon for all available option adders

Oxy-clean treatment is available

### Compatibility & Interchange Data:

Interchangeable to ISO16028

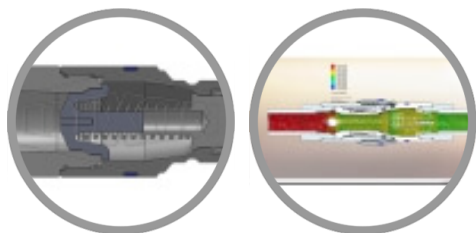

\* Referential image

\*\* Some features may vary without prior notice. Sale subject to inventory availability

Conforms to ISO16028 interchange standard interchangeable with Eaton/Hansen FF, Parker FEM, Snap-tite 74, Faster FFH/2FFN/2FFI, Stucchi A/FIRG and Holmbury HQ/A/FIMC

Safety notes:

WARNING: Cancer and Reproductive Harm- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## TECHNICAL SPECIFICATIONS

|                            |                     |
|----------------------------|---------------------|
| <b>Body Size</b>           | 3/4"                |
| <b>Factory Part Number</b> | HT6F8               |
| <b>Hex</b>                 | 1-3/4"              |
| <b>Length</b>              | 3.54" (89.9mm)      |
| <b>Material</b>            | Steel               |
| <b>Maximum OD</b>          | 1.92" (48.8mm)      |
| <b>Pressure Rating</b>     | See Product Details |
| <b>Thread</b>              | Female NPTF         |
| <b>Thread Size</b>         | 1" - 11-1/2         |
| <b>Weight Lb</b>           | 1.2400              |