

DQC HT-SERIES FLUSHFACE FEMALE THREADED PLUG



DATE
: 07/10/2026 02:31 AM

SKU
: 15648

BRAND
: DIXON VALVE

MODEL
: HT8F8-SS

Specifications:

Rated pressure for connected 316 Stainless Steel Coupler and 316 Stainless Steel Plug: 2,920 PSI (201 bar) Maximum Working and 14,600 PSI (1,007 bar) burst

Features:

High flow performance, compact profile

Easily rebuildable!

High strength laser-cut valve guide maximizes valve stability while minimizing flow restriction.

Improved sealing system incorporates a high performance molded polyurethane or O-ring energized PTFE valve seal.

Construction:

Machined components are manufactured using solid bar stock

Has Nitrile-Energized PTFE valve seals, with a temperature range of -40°F to +250°F

Ancillary nipple seals are Nitrile (Buna-N), with a temperature range of -40°F to +250°F

PTFE or TPC-ET Anti-Extrusion ring protects main coupling valve seal from dynamic impulse pressure damage.

Available Options:


Contact Dixon for all available option adders

Oxy-clean treatment is available

Compatibility & Interchange Data:

Interchangeable to ISO16028

Conforms to ISO16028 interchange standard interchangeable with Eaton/Hansen FF, Parker FEM, Snap-tite 74, Faster FFH/2FFN/2FFI, Stucchi A/FIRG and Holmbury HQ/A/FIMC

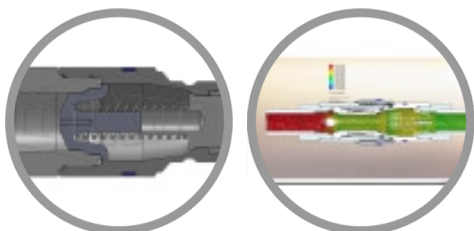

* Referential image

** Some features may vary without prior notice. Sale subject to inventory availability

Safety notes:

WARNING: Cancer and Reproductive Harm- www.P65Warnings.ca.gov

TECHNICAL SPECIFICATIONS

| | |
|----------------------------|---------------------|
| Body Size | 1" |
| Factory Part Number | HT8F8-SS |
| Hex | 1-3/4" |
| Length | 3.50" (88.9mm) |
| Material | 316 Stainless Steel |
| Maximum OD | 1.92" (48.8mm) |
| Pressure Rating | See Product Details |
| Thread | Female NPTF |
| Thread Size | 1" - 11-1/2 |
| Weight Lb | 1.4300 |