


DIXON® COMPLETE ASSEMBLY FRAC FITTING

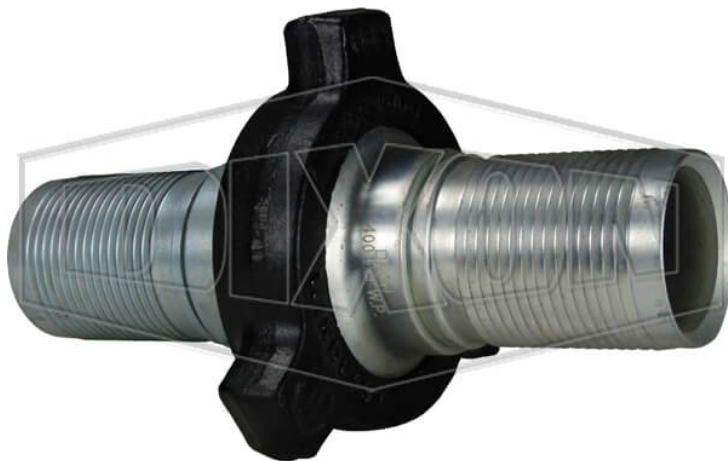

* Referential image

** Some features may vary without prior notice. Sale subject to inventory availability

DATE
: 05/22/2026 09:12 AM

SKU
: 15821

BRAND
: DIXON VALVE

MODEL
: HUMF100300CS

Applications:
Used in the fast paced transfer of water and sand slurry at hydraulic fracturing sites.

Use:
Designed to work with Dixon King Crimp Ferrules.

Features:
One-piece design eliminates leak path experienced with two-piece threaded systems
Long lasting and dependable forged hammer nut
Durable and safe with reliable hose retention when crimped as specified

Construction:
Frac fittings: machined iron to ASTM standards; zinc plated
Nut: forged steel meeting AISI standards
Painted Carbon Steel forged nut
Metal-to-metal sealing surface

Compatibility & Interchange Data:
Interchangeable with current fittings; phase them into your current operation

Safety notes:
WARNING: Cancer and Reproductive Harm- www.P65Warnings.ca.gov
400 PSI working pressure with a minimum 4:1 safety factor (hose burst: hose working pressure) is only achieved with: 2" and 3" sizes using standard crimp ferrules

TECHNICAL SPECIFICATIONS

Description	Male/female complete assembly
Factory Part Number	HUMF100300CS
Mandatory Pkg/Box Qty	1
Material	Iron/Steel
Size	3"
Style	Figure 100
Weight Lb	17.9000
Working Pressure	400 PSI at 70°F (21°C)