


## DIXON® COMPLETE ASSEMBLY FRAC FITTING

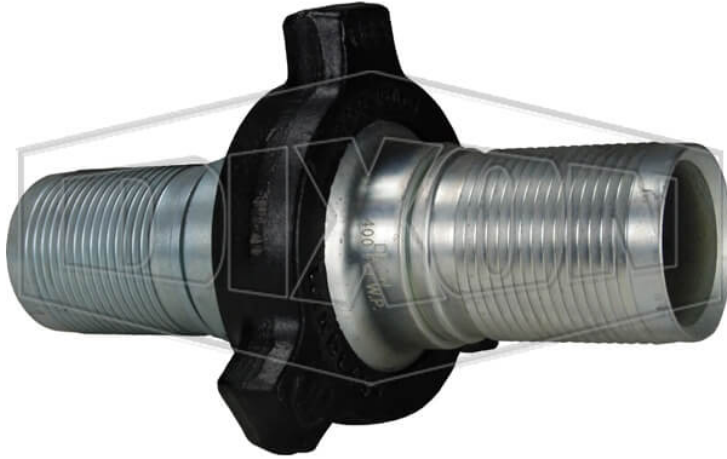

\* Referential image

\*\* Some features may vary without prior notice. Sale subject to inventory availability

DATE  
: 07/08/2026 11:04 PM

SKU  
: 15822

BRAND  
: DIXON VALVE

MODEL  
: HUMF100400CS

### Applications:

Used in the fast paced transfer of water and sand slurry at hydraulic fracturing sites.

### Use:

Designed to work with Dixon King Crimp Ferrules.

### Features:

One-piece design eliminates leak path experienced with two-piece threaded systems

Long lasting and dependable forged hammer nut

Durable and safe with reliable hose retention when crimped as specified

### Construction:

Frac fittings: machined iron to ASTM standards; zinc plated

Nut: forged steel meeting AISI standards

Painted Carbon Steel forged nut

Metal-to-metal sealing surface

### Compatibility & Interchange Data:

Interchangeable with current fittings; phase them into your current operation

### Note:

Water and petroleum transfer hoses rated from 100 to 300 PSI WP (4:1 SF) have excellent test results with the standard King Crimp ferrules CF400-xxCS)

### Safety notes:

400 PSI working pressure with a minimum 4:1 safety factor (hose burst: hose working pressure) is only achieved with: 4" size requires heavy duty (HD) crimp ferrules, CF400-6CSHD through CF400-16CSHD and heavy duty stems  
WARNING: Cancer and Reproductive Harm- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## TECHNICAL SPECIFICATIONS

<b>Description</b>	Male/female complete assembly
<b>Factory Part Number</b>	HUMF100400CS
<b>Mandatory Pkg/Box Qty</b>	1
<b>Material</b>	Iron/Steel
<b>Size</b>	4"
<b>Style</b>	Figure 100
<b>Weight Lb</b>	27.8000
<b>Working Pressure</b>	400 PSI at 70°F (21°C)