


## DIXON® COMPLETE ASSEMBLY FRAC FITTING

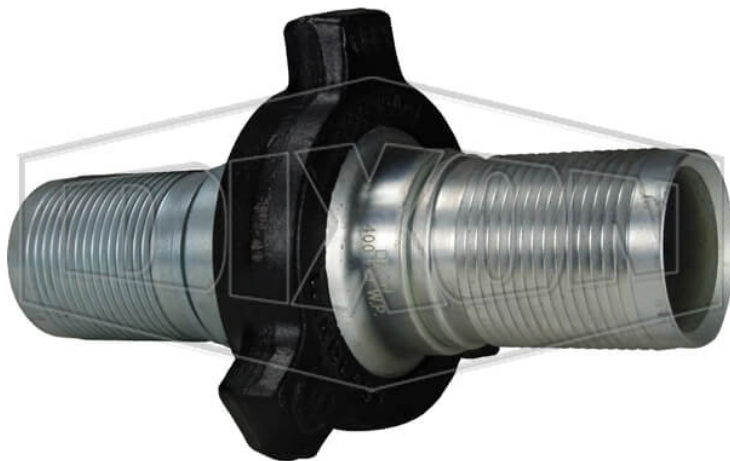

\* Referential image

\*\* Some features may vary without prior notice. Sale subject to inventory availability

DATE  
: 05/22/2026 09:13 AM

SKU  
: 15823

BRAND  
: DIXON VALVE

MODEL  
: HUMF100600CS

Applications:  
Used in the fast paced transfer of water and sand slurry at hydraulic fracturing sites.

Use:  
Designed to work with Dixon King Crimp Ferrules.

Features:  
One-piece design eliminates leak path experienced with two-piece threaded systems

Construction:  
Frac fittings: machined iron to ASTM standards; zinc plated  
Nut: forged steel meeting AISI standards  
Painted Carbon Steel forged nut, Metal-to-metal sealing surface

Compatibility & Interchange Data:  
Interchangeable with current fittings; phase them into your current operation

Safety notes:  
WARNING: Cancer and Reproductive Harm- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)  
230 PSI at 70°F (21°C) 4:1 safety factor

## TECHNICAL SPECIFICATIONS

<b>Description</b>	Male/female complete assembly
<b>Factory Part Number</b>	HUMF100600CS
<b>Mandatory Pkg/Box Qty</b>	1
<b>Material</b>	Iron/Steel
<b>Size</b>	6"
<b>Style</b>	Figure 100
<b>Weight Lb</b>	69.4000
<b>Working Pressure</b>	230 PSI at 70°F (21°C)