


ARO DQC M-SERIES QUICK COUPLER SET- RETAIL PACKAGED

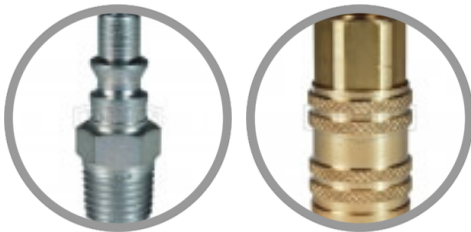

* Referential image

** Some features may vary without prior notice. Sale subject to inventory availability

DATE

: 07/08/2026 12:55 AM

SKU

: 25149

BRAND

: DIXON VALVE

MODEL

: PND-DQCKIT3

Specifications:

Rated pressure for connected Brass Coupler & Brass Plug: 300 PSI (20 bar)

Maximum Working and 12,700 PSI (876 bar) Burst

Rated pressure for connected Brass Coupler & Steel Plug: 300 PSI (20 bar)

Maximum Working and 12,400 PSI (855 bar) Burst

Rated pressure for connected Auto Steel Coupler & Steel Plug: 300 PSI (20 bar)

Maximum Working and 2,600 PSI (179 bar) Burst

Rated pressure for connected Manual Steel Coupler & Steel Plug: 300 PSI (20 bar)

Maximum Working and 12,400 PSI (855 bar) Burst

Construction:

Machined components are manufactured using solid bar stock.

Stainless steel springs. Carbon steel balls and retaining rings.

Nitrile (Buna-N) seals are standard

Steel componentry is plated using ROHS Compliant Trivalent Chrome.

Compatibility & Interchange Data:

Automatic couplings interchange with ARO 210/310 and Hansen 210/310

Manual Couplings Interchange with Parker 50-Series and Amflo Type 'B'

Safety notes:

It is important to be safe when installing quick disconnect couplings into a pneumatic circuit. Never install a pneumatic coupling directly into an air tool, use a piece of hose that is at least 18" long, between the tool and the coupling, to prevent damage to the coupling. To protect the operator, safety devices, such as a safety check valve and safety cable should be installed in case there is a hose or coupling failure.

WARNING: Cancer and Reproductive Harm- www.P65Warnings.ca.gov

TECHNICAL SPECIFICATIONS

Body Size	Coupler - 1/4"
Description	(Case Qty 6 Required)
Factory Part Number	PND-DQCKIT3
Hex	Coupler - 3/4", Plug - 9/16"
Includes	2MF2-B, M2M2
Length	Coupler - 1.97", Plug - 1.60"
Mandatory Pkg/Box Qty	6
Material	Brass, Steel
Maximum OD	Coupler - 0.87", Plug - 0.65"
Pressure Rating	See Product Details
Temperature Range	-40°F to +250°F (-40°C to +121°C)
Thread	NPT
Thread Size	1/4"
Weight Lb	0.3350