


DIXON COMPLETE ASSEMBLY FRAC FITTING

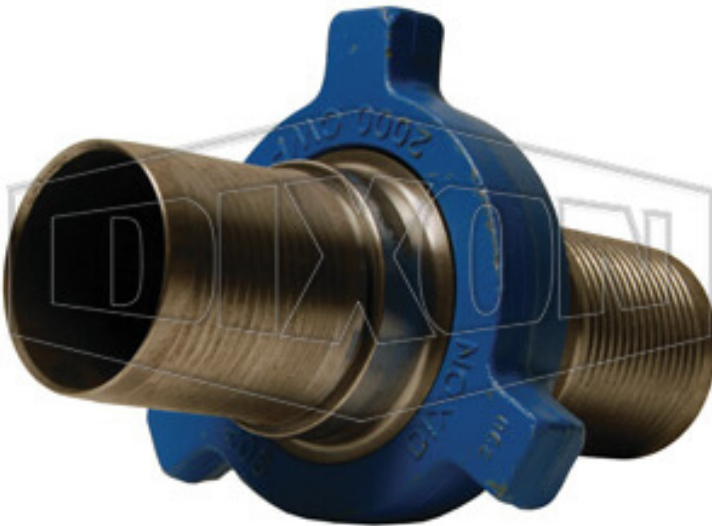

* Referential image

** Some features may vary without prior notice. Sale subject to inventory availability

DATE
: 04/29/2026 06:29 AM

SKU
: 27624

BRAND
: DIXON VALVE

MODEL
: RHUMF206400CS

Applications:

Used in the fast paced transfer of water and sand slurry at hydraulic fracturing sites.

Use:

Designed to work with Dixon King Crimp Ferrules.

Specifications:

316 stainless steel stems to ASTM A47 standard

Features:

One-piece design eliminates leak path experienced with two-piece threaded systems

Long lasting and dependable forged hammer nut

Durable and safe with reliable hose retention when crimped as specified

Construction:

Frac fittings: 316 stainless steel to ASTM standards

Nut: Painted Forged Carbon Steel

EPDM Oring (O347EPDM)

Figure 200 has a metal-to-metal sealing surface and Figure 206 is similar to Figure 200 with a secondary seal to supplement the metal-to-metal design.

Compatibility & Interchange Data:

Interchangeable with current fittings; phase them into your current operation

Note:

Water and petroleum transfer hoses rated from 100 to 300 PSI WP (4:1 SF) have excellent test results with the standard King Crimp ferrules CF400-xxSS)

Safety notes:

WARNING: Cancer and Reproductive Harm- www.P65Warnings.ca.gov

400 PSI at 70°F (21°C) 4:1 safety factor

TECHNICAL SPECIFICATIONS

Description	Male/female complete assembly
Mandatory Pkg/Box Qty	1
Material	316 Stainless Steel
Factory Part Number	RHUMF206400CS
Size	4"
Style	Figure 206
Weight Lb	33.4500
Working Pressure	400 PSI at 70°F (21°C)