
SPLIT FLANGE SWIVEL STYLE 20 FEMALE NPT

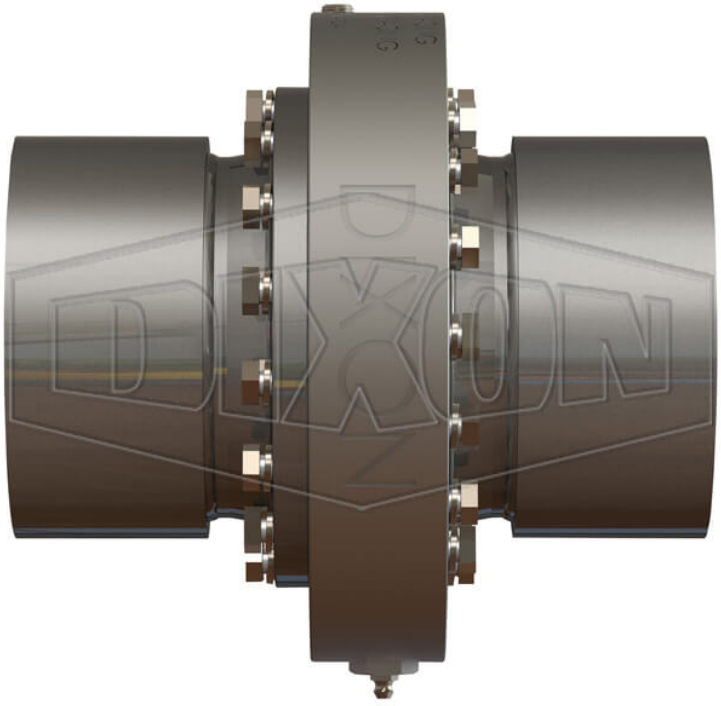

** Referential image*
*** Some features may vary without prior notice. Sale subject to inventory availability*

DATE
: 10/29/2026 11:25 PM

SKU
: 27643

BRAND
: DIXON VALVE

MODEL
: SF320FXFCS00

Applications:
For use in industries from petroleum, blending plants, petrochemical, refining, mining, distilling, paint plants, farm irrigation and fertilizing, wastewater treatment, food and beverage process equipment, marine and many more
Features:
Bearing pack design allows easy seal change without removing the ball bearings.
Simple maintenance: remove one nose piece, replace seal pack, and reinstall with little down-time.
Instream seal separates the wetted area from the ball bearings allowing for longer bearing pack life over conventional swivels.
Wide set bearing race for higher moment loads
Compact design for low profile applications
Construction:
Bearing pack: through hardened forged high carbon alloy
Material contact surfaces: stainless steel or carbon steel nose pieces
Available Options:
All styles
Stock end configurations: 150 lb. and 300 lb. flanges, FNPT, butt weld, others per request
Stock seals: Baylast™, FKM, PTFE, others per request
Full penetration weld
Safety notes:
WARNING: Cancer and Reproductive Harm- www.P65Warnings.ca.gov

2645 Executive Park Drive, Weston, Fort Lauderdale, FL 33331, EEUU
sales@kmxusa.us
www.kmxusa.us

TECHNICAL SPECIFICATIONS

Material	Carbon Steel
Factory Part Number	SF320FXFCS00
Pressure Rating	600 PSI
Seal	Baylast?
Size	3"
Temperature Range	-35°F to 212°F (-37°C to 100°C)

KMX

2645 Executive Park Drive, Weston, Fort Lauderdale, FL 33331, EEUU
sales@kmxusa.us

www.kmxusa.us