


SPLIT FLANGE SWIVEL STYLE 20 150# FLANGE

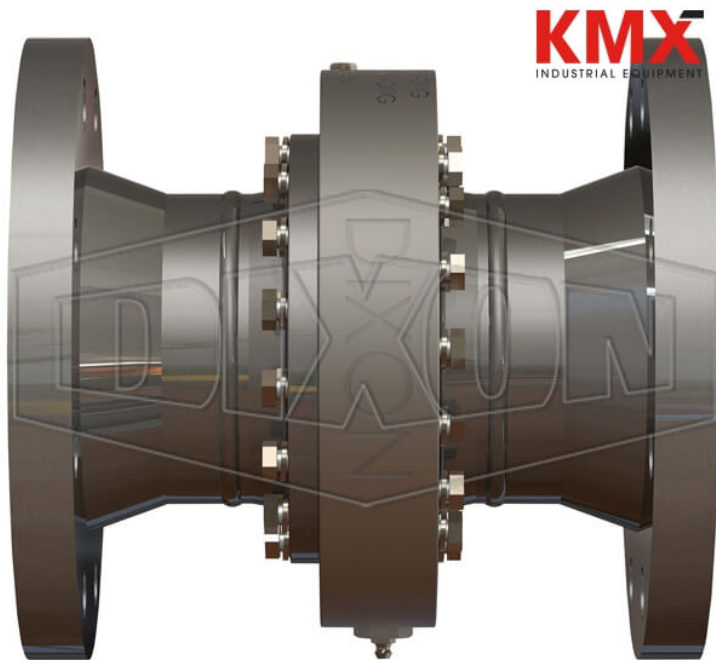

* Referential image

** Some features may vary without prior notice. Sale subject to inventory availability

DATE

: 04/22/2026 06:20 PM

SKU

: 19188

BRAND

: DIXON VALVE

MODEL

: SF420FGXFGCS10

Applications:

For use in industries from petroleum, blending plants, petrochemical, refining, mining, distilling, paint plants, farm irrigation and fertilizing, wastewater treatment, food and beverage process equipment, marine and many more

Features:

Bearing pack design allows easy seal change without removing the ball bearings.

Simple maintenance: remove one nose piece, replace seal pack, and reinstall with little down-time.

Instream seal separates the wetted area from the ball bearings allowing for longer bearing pack life over conventional swivels.

Wide set bearing race for higher moment loads

Compact design for low profile applications

Construction:

Bearing pack: through hardened forged high carbon alloy

Material contact surfaces: stainless steel or carbon steel nose pieces

Available Options:

All styles

Stock end configurations: 150 lb. and 300 lb. flanges, FNPT, butt weld, others per request

Stock seals: Baylast™, FKM, PTFE, others per request

Full penetration weld

Safety notes:

WARNING: Cancer and Reproductive Harm- www.P65Warnings.ca.gov

TECHNICAL SPECIFICATIONS

Factory Part Number	SF420FGXFGCS10
Material	Carbon Steel
Pressure Rating	up to 600 PSI
Seal	FKM
Size	4"
Temperature Range	-40°F to 450°F (-40°C to 232°C)
Weight Lb	55.0000