


TECTITE[®] BY APOLLO[®] PUSH TO CONNECT SLIP COUPLING

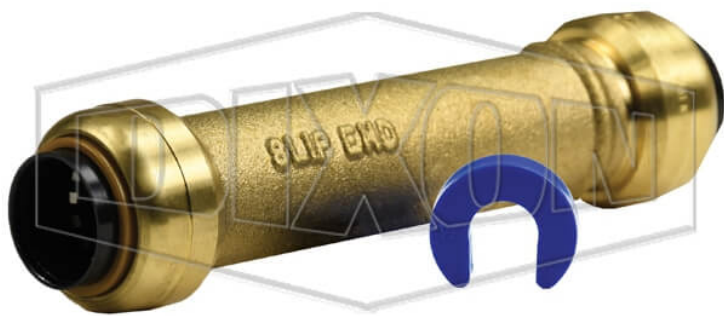

* Referential image

** Some features may vary without prior notice. Sale subject to inventory availability

DATE

: 04/27/2026 09:55 AM

SKU

: 21439

BRAND

: DIXON VALVE

MODEL

: U3008

Use:

Connects copper, CPVC, PEX, PE-RT pipe in any combination

Approved for use underground and behind walls without access panels

Specifications:

Certified and listed to ASSE1061, ANSI/NSF 61, and ANSI/NSF 14

Listed by IAPMO

Meets UPC, IPC and cUPC requirements

Features:

No soldering, clamps, unions or glue needed

Integral tube liner for PEX installations

Easy to disconnect if needed

Can be rotated after assembly for easier installation in tight spaces

Construction:

All Tectite[™] by Apollo[®] fittings are lead free

Compatibility & Interchange Data:

Comparable to Sharkbite[®]

Safety notes:

For water, dry, clean air or 100% glycol solutions only, vacuum

For use with copper only

WARNING: Cancer and Reproductive Harm- www.P65Warnings.ca.gov

TECHNICAL SPECIFICATIONS

Factory Part Number	U3008
Material	Forged Brass
Maximum Operating Pressure	200 PSI
Temperature Range	32°F - 250°F (0°C - 121°C)
Tube Size	1/2"
Weight Lb	0.2800