


## FEMALE 37° JIC SWIVEL X PUSH-ON 90° ELBOW

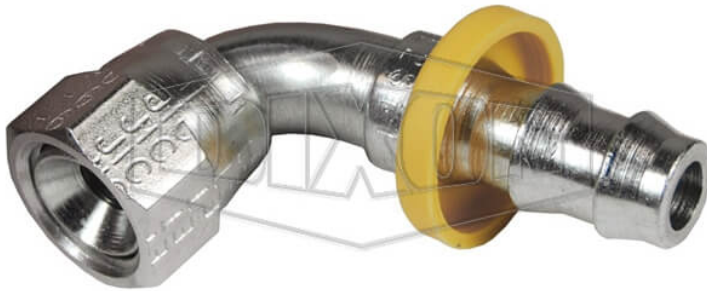

\* Imágenes referenciales

\*\* Algunas características pueden variar sin previo aviso, venta sujeta a stock disponible

FECHA

: 08/16/2026 05:08 PM

SKU

: 2932

MARCA

: DIXON VALVE

MODELO

: 2890407C

Specifications:

Number of Barbs: 2

Length Centerline C: 1.55"

Length Centerline D: .83"

Features:

JIC only

Installation

Assembly Instructions:

1. Trim hose end with smooth square cut.
2. Lubricate either push-on fitting, hose or both.
3. Insert push-on fitting into hose until first barb is in hose.
4. Place end of fitting against a flat object (bench, wall, etc.) and grip the hose one inch from end. Push with a steady force until end of hose is covered by yellow plastic cap.

Instructions

Disassembly instructions:

1. Leaving push-on fitting in place, make a 1" cut in the hose along the barbed end of the fitting. Note: Be careful not to nick barbs when cutting the hose.
2. With firm grip on hose, give a sharp downward pull to release the fitting from the hose.

Note:

No hose clamps or ferrules are needed

Part is JIC only, may substitute dual angle. Contact Dixon.

Safety notes:

Dixon push-on fittings are intended for use with Lok-On (push-on style) hose only.

Caution: Push-on fittings will properly grip push-on hose only when pushed all the way in, with the cut end of the hose completely concealed by the plastic cap.

WARNING: Cancer and Reproductive Harm- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## ESPECIFICACIONES TÉCNICAS

|                     |                    |
|---------------------|--------------------|
| Factory Part Number | 2890407C           |
| Component Material  | Yellow Plastic Cap |
| Weight Lb           | 0.0560             |
| Female Thread       | UNF                |
| Female Thread Size  | 7/16"-20           |
| Hose ID             | 1/4"               |
| Material            | Plated Steel       |
| Pressure Rating     | 350 PSI            |
| Temperature Range   | -40 to +150°F      |
| Tube OD             | 1/4"               |