
# ANSI SPLIT FLANGE- SERIES SF

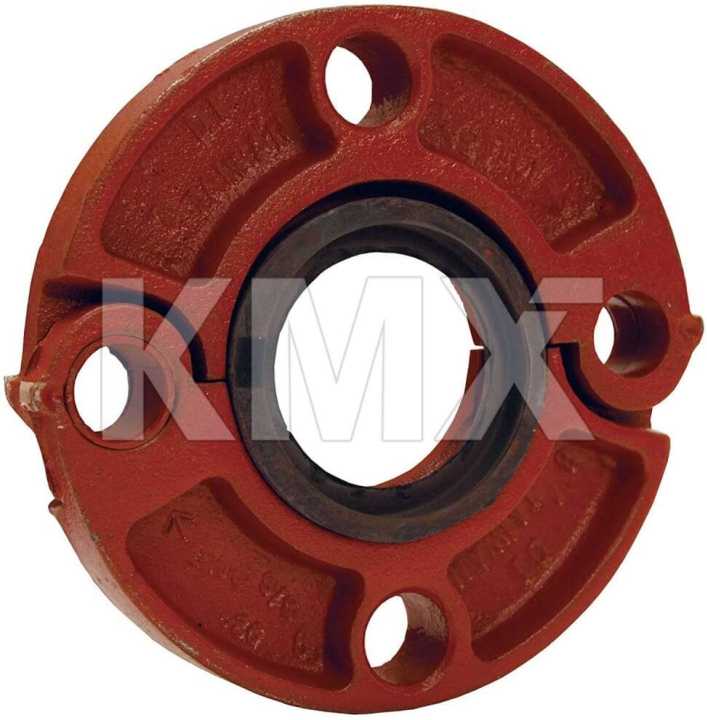

** Imágenes referenciales*
*** Algunas características pueden variar sin previo aviso, venta sujeta a stock disponible*

FECHA
: 11/26/2026 09:33 PM

SKU
: 23074

MARCA
: DIXON VALVE

MODELO
: ANSI25

Applications:
Provides a direct connection between a grooved adapter and an ANSI Class 125 and 150 raised face flanged component.

Use:
Can be used with flat face flanges by removing the raised projections on the outside face of the flange

Specifications:
Underwriters Listed
Factory Mutual approved
Bolts: 4
Bolt Size: 5/8"
Bolt Length: 5/8"

Features:
Comparable to Victaulic's #741 and Grinnell's #7012

Construction:
Rust inhibiting paint
EPDM gasket

Available Options:
Buna gaskets are available upon request, contact Dixon.

Safety notes:

WARNING: Cancer and Reproductive Harm- www.P65Warnings.ca.gov



KMX
2645 Executive Park Drive, Weston, Fort Lauderdale, FL 33331, EEUU
sales@kmxusa.us
www.kmxusa.us

## ESPECIFICACIONES TÉCNICAS

| | |
|---|---|
| **Factory Part Number** | ANSI25 |
| **Material** | Ductile Iron |
| **Maximum Operating Pressure** | 300 PSI at 70°F(21°C) |
| **Nominal Size** | 2-1/2" |
| **Pipe OD** | 2.875" |
| **Weight Lb** | 4.5200 |



KMX
2645 Executive Park Drive, Weston, Fort Lauderdale, FL 33331, EEUU
sales@kmxusa.us
www.kmxusa.us