

ANSI SPLIT FLANGE- SERIES SF

FECHA

: 06/07/2026 04:42 PM

SKU

: 23074

MARCA

: DIXON VALVE

MODELO

: ANSI25

Applications:

Provides a direct connection between a grooved adapter and an ANSI Class 125 and 150 raised face flanged component.

Use:

Can be used with flat face flanges by removing the raised projections on the outside face of the flange

Specifications:

Underwriters Listed

Factory Mutual approved

Bolts: 4

Bolt Size: 5/8"

Bolt Length: 5/8"

Features:

Comparable to Victaulic's #741 and Grinnell's #7012

Construction:

Rust inhibiting paint


EPDM gasket

Available Options:

Buna gaskets are available upon request, contact Dixon.

Safety notes:

WARNING: Cancer and Reproductive Harm- www.P65Warnings.ca.gov

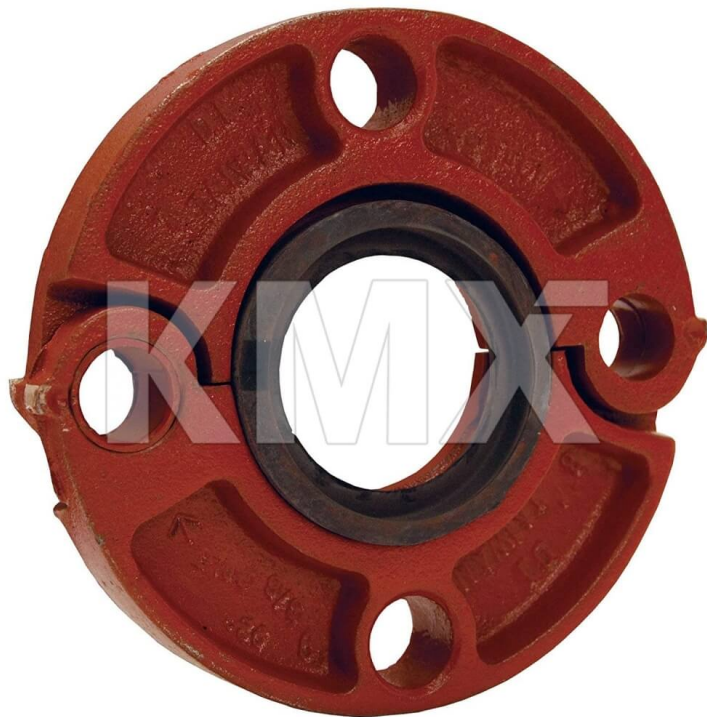

* Imágenes referenciales

** Algunas características pueden variar sin previo aviso, venta sujeta a stock disponible

ESPECIFICACIONES TÉCNICAS

Factory Part Number	ANSI25
Material	Ductile Iron
Maximum Operating Pressure	300 PSI at 70°F(21°C)
Nominal Size	2-1/2"
Pipe OD	2.875"
Weight Lb	4.5200