

## ANSI SPLIT FLANGE- SERIES SF

FECHA

: 04/19/2026 02:04 PM

SKU

: 23075

MARCA

: DIXON VALVE

MODELO

: ANSI30

Applications:

Provides a direct connection between a grooved adapter and an ANSI Class 125 and 150 raised face flanged component.

Use:

Can be used with flat face flanges by removing the raised projections on the outside face of the flange

Specifications:

Underwriters Listed

Factory Mutual approved

Bolts: 4

Bolt Size: 5/8"

Bolt Length: 5/8"

Features:

Comparable to Victaulic's #741 and Grinnell's #7012

Construction:

Rust inhibiting paint


EPDM gasket

Available Options:

Buna gaskets are available upon request, contact Dixon.

Safety notes:

WARNING: Cancer and Reproductive Harm- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

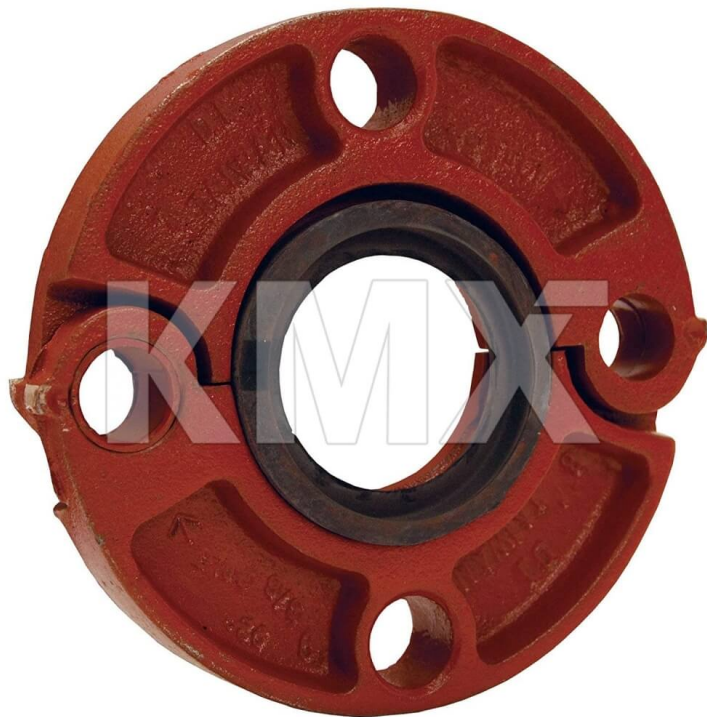

\* Imágenes referenciales

\*\* Algunas características pueden variar sin previo aviso, venta sujeta a stock disponible

## ESPECIFICACIONES TÉCNICAS

<b>Factory Part Number</b>	ANSI30
<b>Material</b>	Ductile Iron
<b>Maximum Operating Pressure</b>	300 PSI at 70°F(21°C)
<b>Nominal Size</b>	3"
<b>Pipe OD</b>	3.50"
<b>Weight Lb</b>	4.9000