


## ARO DQC M-SERIES QUICK COUPLER SET- RETAIL PACKAGED

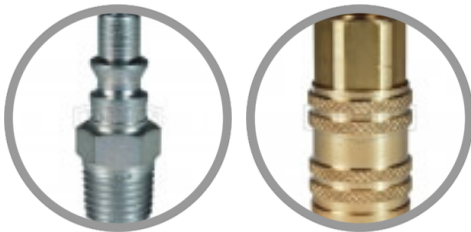

\* Imágenes referenciales

\*\* Algunas características pueden variar sin previo aviso, venta sujeta a stock disponible

FECHA

: 06/27/2026 03:20 PM

SKU

: 25149

MARCA

: DIXON VALVE

MODELO

: PND-DQCKIT3

### Specifications:

Rated pressure for connected Brass Coupler & Brass Plug: 300 PSI (20 bar)

Maximum Working and 12,700 PSI (876 bar) Burst

Rated pressure for connected Brass Coupler & Steel Plug: 300 PSI (20 bar)

Maximum Working and 12,400 PSI (855 bar) Burst

Rated pressure for connected Auto Steel Coupler & Steel Plug: 300 PSI (20 bar)

Maximum Working and 2,600 PSI (179 bar) Burst

Rated pressure for connected Manual Steel Coupler & Steel Plug: 300 PSI (20 bar) Maximum Working and 12,400 PSI (855 bar) Burst

### Construction:

Machined components are manufactured using solid bar stock.

Stainless steel springs. Carbon steel balls and retaining rings.

Nitrile (Buna-N) seals are standard

Steel componentry is plated using ROHS Compliant Trivalent Chrome.

### Compatibility & Interchange Data:

Automatic couplings interchange with ARO 210/310 and Hansen 210/310

Manual Couplings Interchange with Parker 50-Series and Amflo Type 'B'

### Safety notes:

It is important to be safe when installing quick disconnect couplings into a pneumatic circuit. Never install a pneumatic coupling directly into an air tool, use a piece of hose that is at least 18" long, between the tool and the coupling, to prevent damage to the coupling. To protect the operator, safety devices, such as a safety check valve and safety cable should be installed in case there is a hose or coupling failure.

WARNING: Cancer and Reproductive Harm- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

**ESPECIFICACIONES TÉCNICAS**

<b>Body Size</b>	Coupler - 1/4"
<b>Description</b>	(Case Qty 6 Required)
<b>Factory Part Number</b>	PND-DQCKIT3
<b>Hex</b>	Coupler - 3/4", Plug - 9/16"
<b>Includes</b>	2MF2-B, M2M2
<b>Length</b>	Coupler - 1.97", Plug - 1.60"
<b>Mandatory Pkg/Box Qty</b>	6
<b>Material</b>	Brass, Steel
<b>Maximum OD</b>	Coupler - 0.87", Plug - 0.65"
<b>Pressure Rating</b>	See Product Details
<b>Temperature Range</b>	-40°F to +250°F (-40°C to +121°C)
<b>Thread</b>	NPT
<b>Thread Size</b>	1/4"
<b>Weight Lb</b>	0.3350