

DUAL-LOCK P-SERIES THOR INTERCHANGE COUPLER WITH FERRULE




FECHA
: 06/21/2026 03:39 PM

SKU
: 22682

MARCA
: DIXON VALVE

MODELO
: 4PS4-WF

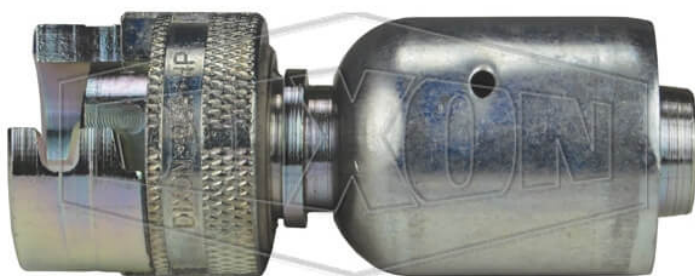

Construction:

Machined components are manufactured using solid steel bar stock
Stainless steel retaining ring and spring maximize corrosion resistance and extend service life
Steel componentry is plated using ROHS Compliant Trivalent Chrome
Steel couplings have a zinc cast sleeve
Nitrile (Buna-N) seals standard, temperature range-40°F to 250°F (-40°C to 121°C)

Available Options:

3/8" and 1" sizes available upon request, contact Dixon®

Compatibility & Interchange Data:

Thor Finger-Lock Interchange
Interchanges with Thor PHC-series, National Series 'A' and Campbell Double-Lock

Safety notes:

WARNING: Cancer and Reproductive Harm- www.P65Warnings.ca.gov

* Imágenes referenciales

** Algunas características pueden variar sin previo aviso, venta sujeta a stock disponible

ESPECIFICACIONES TÉCNICAS

| | |
|---------------------|-------------------------------|
| Body Size | 1/2" |
| Factory Part Number | 4PS4-WF |
| Hose ID | 1/2" |
| Hose OD From | 54/64" |
| Hose OD To | 1-2/64" |
| Material | Trivalent Chrome Plated Steel |

ESPECIFICACIONES TÉCNICAS

| | |
|-------------------------|---|
| Weight Lb | 0.6300 |
| Working Pressure | 300 PSI at ambient temperature 70°F (21°C) |