

## CJ-SERIES PNEUMATIC MALE THREADED PLUG



DATE  
: 07/09/2026 11:28 PM

SKU  
: 10126

BRAND  
: DIXON VALVE

MODEL  
: CJ3M4

### Specifications:

Rated pressure for connected Brass Coupler & Steel Plug: 300 PSI (20 bar)  
Maximum Working and 8,000 PSI (552 bar) Burst

### Construction:

Machined components are manufactured using solid steel bar stock.  
Steel componentry is plated using ROHS Compliant Trivalent Chrome.


### Compatibility & Interchange Data:

European High-Flow Interchange  
Interchanges with Rectus 27KA, CEJN 410 and other like designs

### Safety notes:

It is important to be safe when installing quick disconnect couplings into a pneumatic circuit. Never install a pneumatic coupling directly into an air tool, use a piece of hose that is at least 18" long, between the tool and the coupling, to prevent damage to the coupling. To protect the operator, safety devices, such as a safety check valve and safety cable should be installed in case there is a hose or coupling failure.

WARNING: Cancer and Reproductive Harm- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

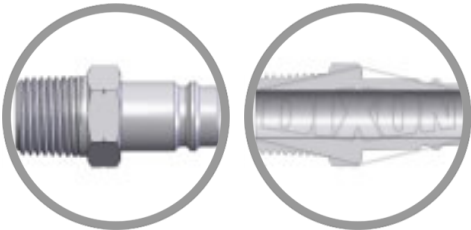

\* Referential image

\*\* Some features may vary without prior notice. Sale subject to inventory availability

## TECHNICAL SPECIFICATIONS

<b>Body Size</b>	3/8"
<b>Factory Part Number</b>	CJ3M4
<b>Hex</b>	7/8"
<b>Length</b>	1.81" (46.0mm)
<b>Material</b>	Steel
<b>Maximum OD</b>	1.01" (25.7mm)
<b>Pressure Rating</b>	See Product Details
<b>Temperature Range</b>	-40°F to +250°F (-40°C to +121°C)
<b>Thread</b>	NPT
<b>Thread Size</b>	1/2"
<b>Weight Lb</b>	0.1800