


DQC HT-SERIES FLUSHFACE FEMALE THREADED PLUG

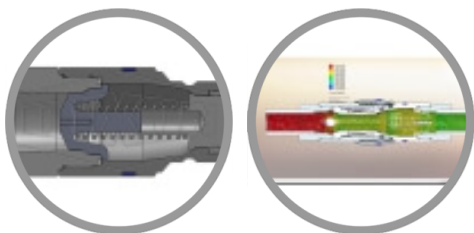

* Referential image

** Some features may vary without prior notice. Sale subject to inventory availability

DATE
: 05/23/2026 03:18 PM

SKU
: 15646

BRAND
: DIXON VALVE

MODEL
: HT8F10-SS

Specifications:

Rated pressure for connected 316 Stainless Steel Coupler and 316 Stainless Steel Plug: 2,920 PSI (201 bar) Maximum Working and 14,600 PSI (1,007 bar) burst

Features:

High flow performance, compact profile

Easily rebuildable!

High strength laser-cut valve guide maximizes valve stability while minimizing flow restriction.

Improved sealing system incorporates a high performance molded polyurethane or O-ring energized PTFE valve seal.

Construction:

Machined components are manufactured using solid bar stock

Has Nitrile-Energized PTFE valve seals, with a temperature range of -40°F to +250°F

Ancillary nipple seals are Nitrile (Buna-N), with a temperature range of -40°F to +250°F

PTFE or TPC-ET Anti-Extrusion ring protects main coupling valve seal from dynamic impulse pressure damage.

Available Options:

Contact Dixon for all available option adders

Oxy-clean treatment is available

Compatibility & Interchange Data:

Interchangeable to ISO16028

Conforms to ISO16028 interchange standard interchangeable with Eaton/Hansen FF, Parker FEM, Snap-tite 74, Faster FFH/2FFN/2FFI, Stucchi A/FIRG and Holmbury HQ/A/FIMC

Safety notes:

WARNING: Cancer and Reproductive Harm- www.P65Warnings.ca.gov

TECHNICAL SPECIFICATIONS

Body Size	1"
Factory Part Number	HT8F10-SS
Hex	2"
Length	3.61" (91.7mm)
Material	316 Stainless Steel
Maximum OD	2.19" (55.6mm)
Pressure Rating	See Product Details
Thread	Female NPTF
Thread Size	1-1/4" - 1 1/2"
Weight Lb	1.8400