


RAPP-IT PIPE REPAIR KIT

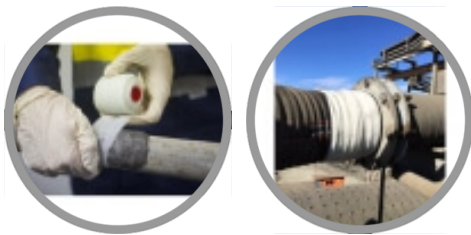

* Referential image

** Some features may vary without prior notice. Sale subject to inventory availability

DATE

: 05/07/2026 09:16 PM

SKU

: 17840

BRAND

: DIXON VALVE

MODEL

: RAP123

Applications:

Temporary/emergency pipe repair on leaking or damaged pipes

Use:

Wrap tightly around leaking/damaged pipe. For best results, the completed bandage application should be no less than 10mm thick (12-15 wraps). Difficult or large applications may require multiple bandages.

Specifications:

Both Rapp-it Bandage and Rapp-it Steel Putty are compliant with Australian Standard (AS/NZS 4020:2005).

Rapp-it Steel Putty is compliant with the equivalent US Standard, NSF 61.

How it works:

Shut down pipes. Apply gloves, then thoroughly clean and roughen the damaged pipe area with a metal file or wire brush. A clean, rough surface results in a successful repair. Knead steel putty until it is a uniform grey color. Apply firmly to the damaged area within 2-5 minutes of mixing. Open the foil pouch and soak the bandage in freshwater for 10 seconds. Squeeze bandage 1-2 times while in the water to help activation. It is important to apply the bandage before the putty is cured. Quickly wrap the bandage around the damaged area, extending 50mm on either side of the leak. Pull each layer tightly and firmly throughout the application, using your hand to mold and squeeze the layers together in a tightening motion. Continue to squeeze the bandage with a rotating motion until resin stops foaming and is set. Allow a minimum of 30 minutes for Rapp-it bandage to set rock hard.

Safety notes:

WARNING: Cancer and Reproductive Harm- www.P65Warnings.ca.gov

TECHNICAL SPECIFICATIONS

Includes	Woven fiberglass bandage impregnated with water-activated resin and a 90mm stick of Rapp-It steel putty
Material	water-activated polyurethane
Optional Pkg/Box Qty	1
Factory Part Number	RAP123
Temperature Rating	300°F
Used on	Bonds to most pipes: steel, polypipe, PVC, fiberglass, copper
Weight Lb	0.6000
Working Pressure	360 PSI